This guide explains how to remove, reflash, reassamble and setup your Scape X® device

We recommend to replace the sd card with an industrial grade sd card (e.g. 8GB pSLC, C10, ECC)

- Power off the display (unplug AC)
- Find the lid that covers the SD card on the rear side of your Scape® Tangible

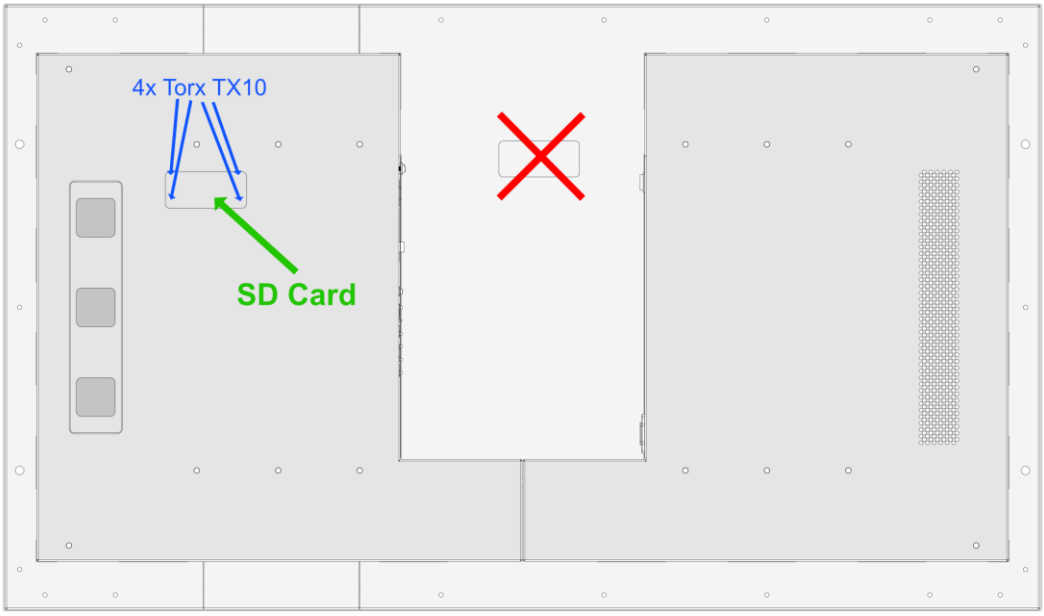

- Unscrew the 4 TX10 torx screws and remove the lid
- Take out SD card

- Download the system image file from https://download.interactive-scape.com/toa-latest
- Take a software of your choice to write images to SD cards, e.g. https://rufus.ie
- Write the image to the SD card

- Reassamble everything and turn the display on
- Make sure that the TUIO/USB switch iss et to TUIO

- http://10.0.0.20
- Select your display model or upload your specific screen bundle file

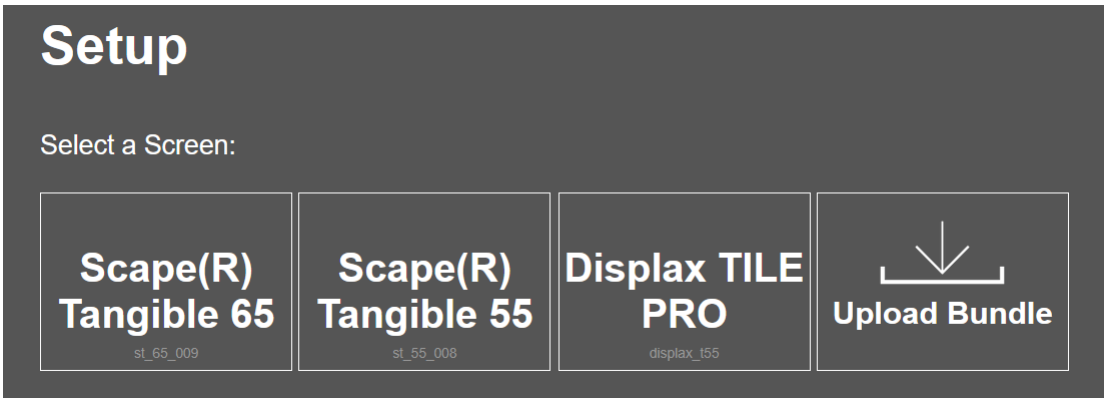

Do not interrupt the sensor calibration!

- Show „Expert Options

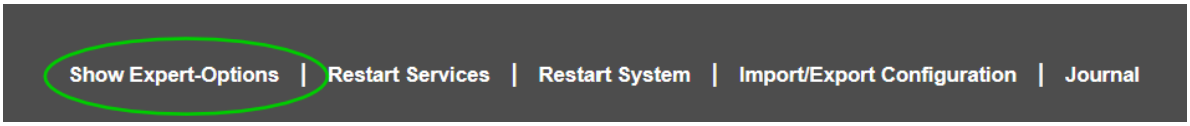

- Set your device's hostname to the its serial number – replace „.“ with „-“

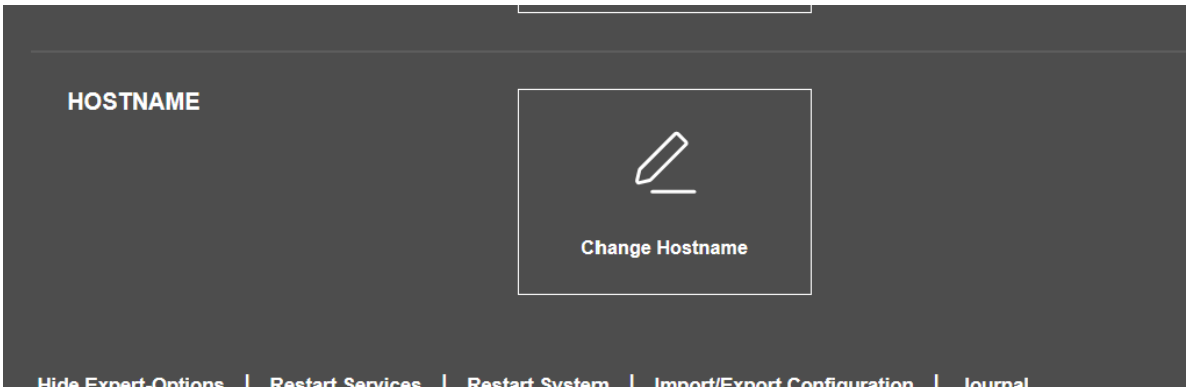

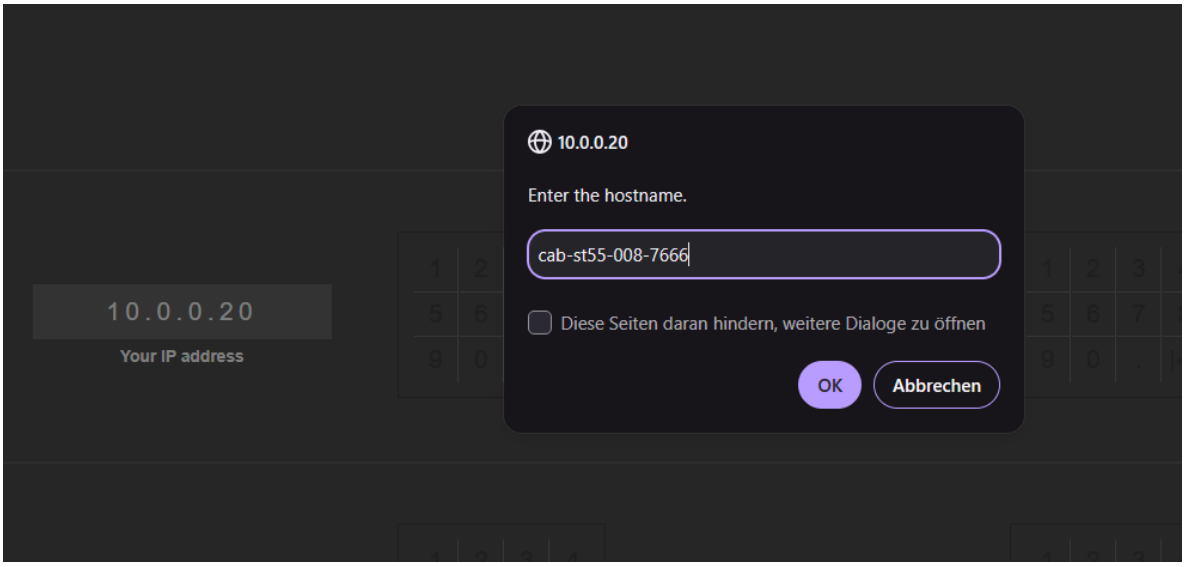
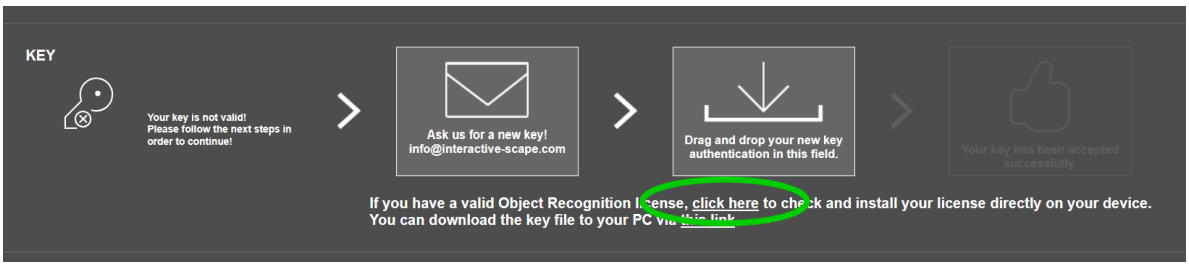
- Re-activate your Scape X® license